Heyco® Snap Bushings

Mounting Hole Diameter Range: .250˝ (6,4 mm) to .875˝ (22,2 mm)

- **Convert raw-edged holes to smooth, neat, insulated holes.**
- Insulate and mechanically protect electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Locking fingers snap into holes with fingertip pressure.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstand a push back force of 35 pounds.
- Available in multiple sizes for use in .250˝ (6,4 mm) to 6.00˝ (152,4 mm) diameter holes.
- We offer the following brass-colored parts for lamp and lighting applications:
  Part No. 2012, SB 312-3 Brass
  Part No. 2033, SB 375-4 Brass
  Part No. 2041, SB 437-4 Brass

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS					
					A Inside Diameter		B Head Diameter		C Overall Height	
		Black	White							
in.	mm.				in.	mm.	in.	mm.	in.	mm.
Single Locking Step for Panel Thickness up to .040˝ (1,0 mm)										
.250	6,4	**2003**	**2004**	SB 250-040	.13	3,2	.31	7,9	.31	7,9
Single Locking Step for Panel Thickness up to .062˝ (1,6 mm)										
.250	6,4	**2000**	**2001**	SB 250-2	.14	3,6	.31	7,9	.31	7,9
.312	7,9	**2010**	**2011**	SB 312-3	.19	4,8	.38	9,5		
Multiple Locking Steps for Panel Thickness up to .125˝ (3,2 mm)										
.375	9,5	**2020**	**2021**	SB 375-3	.19	4,8	.47	11,9	.41	10,3
		2030	**2031**	SB 375-4	.25	6,4				
.437	11,1	**2042**	**2037**	SB 437-243	.24	6,2	.53	13,5		
		2038	**2039**	SB 437-4	.27	6,8				
		2043	**2044**	SB 437-5	.31	7,9				
.500	12,7	**2058**	**2059**	SB 500-4	.25	6,4	.57	14,5		
		2049	**2050**	SB 500-5	.31	7,9				
		2053	**2054**	SB 500-6	.39	9,9				
.562	14,3	**2060**	**2061**	SB 562-5	.31	7,9	.66	16,7		
		2063	**2064**	SB 562-6	.39	9,9				
		2066	**2067**	SB 562-7	.44	11,1				
.625	15,9	**2075**	**2078**	SB 625-4	.25	6,4	.72	18,2		
		2070	**2071**	SB 625-7	.44	11,1				
		2073	**2074**	SB 625-8	.50	12,7				
.687	17,4	**2083**	**2084**	SB 687-8	.50	12,7	.78	19,8		
		2086	**2087**	SB 687-9	.56	14,3				
.750	19,1	**2090**	**2091**	SB 750-6	.39	9,9	.85	21,6		
		2092	**2099**	SB 750-8	.50	12,7				
		2093	**2094**	SB 750-9	.56	14,3				
		2096	**2097**	SB 750-10	.61	15,5				
.812	20,6	**2100**	**2101**	SB 812-9	.56	14,3	.89	22,6		
		2103	**2104**	SB 812-10	.63	15,9				
.875	22,2	**2110**	**2111**	SB 875-6	.38	9,5	.95	24,2	.45	11,5
		2113	**2114**	SB 875-7	.44	11,1				
		2116	**2117**	SB 875-8	.50	12,7				
		2120	**2121**	SB 875-9	.56	14,3				
		2123	**2124**	SB 875-10	.63	15,9				
		2126	**2127**	SB 875-11	.69	17,5				

Standard colors black and white. Consult Heyco for other colors.

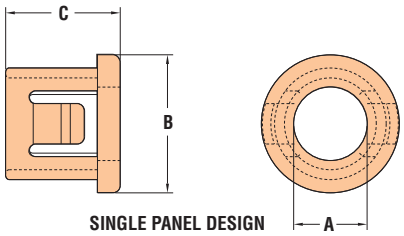

SINGLE PANEL DESIGN

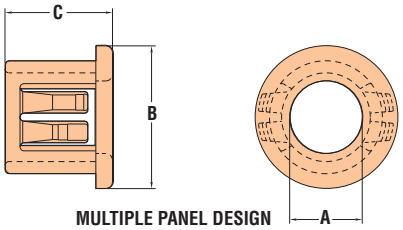

MULTIPLE PANEL DESIGN

Quick Specs

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E15331
	Certified by Canadian Standards Association, File 8919
Flammability Rating	94V-2
Temperature Range	-.4°F (-18°C) to 221°F (105°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

Heyco® Snap Bushings

Mounting Hole Diameter Range: 1.000″ (25,4 mm) to 2.500″ (63,5 mm)

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS					
					A Inside Diameter		B Head Diameter		C Overall Height	
in.	mm.	Black	White		in.	mm.	in.	mm.	in.	mm.
Multiple Locking Steps for Panel Thickness up to .125″ (3,2 mm)										
1.000	25,4	2140	2141	SB 1000-12	.77	19,4	1.13	28,6	.45	11,5
1.093 - 1.125	27,8 - 28,6	2160 2163 2166	2161 2164 2167	SB 1093-13 SB 1093-14 SB 1093-15	.81 .88 .94	20,6 22,2 23,8	1.22	30,9		
1.187	30,2	2182	2183	SB 1187-15	.94	23,8	1.32	33,5		
1.250	31,8	2198	2199	SB 1250-15	.94	23,8	1.36	34,5		
		2201	2202	SB 1250-16	1.00	25,4	1.31	33,3		
1.375	34,9	2207 2210	2208 2211	SB 1375-14 SB 1375-16	.88 1.01	22,2 25,8	1.49	37,9		
1.500	38,1	2233 2236 2240	2234 2237 2241	SB 1500-17 SB 1500-18 SB 1500-21	1.06 1.13 1.31	27,0 28,6 33,3	1.61	40,9		
1.625	41,3	2273	2274	SB 1625-21	1.31	33,3	1.74	44,2		
1.750	44,5	2300	2301	SB 1750-22	1.38	34,9	1.88	47,6		
1.875	47,6	2287	2288	SB 1875-24	1.50	38,1	2.00	50,8		
2.000	50,8	2400 2406	2401 2414	SB 2000-26 SB 2000-28	1.64 1.75	41,6 44,5	2.13	54,0		
Multiple Locking Steps for Panel Thickness up to .250″ (6,4 mm)										
2.093	53,1	2415	2416	SB 2.093-29	1.81	46,0	2.35	59,7	.72	18,3
2.250	57,2	2419 2417	- 2418	SB 2.250-29-180 SB 2.250-29	1.80 1.86	45,7 47,1	2.48	63,1		
2.500	63,5	2420	2421	SB 2.500-31	1.97	50,0	2.66	67,5		

NEW!

Standard colors black and white. Consult Heyco for other colors.

- **Convert raw-edged holes to smooth, neat, insulated holes.**
- Insulate and mechanically protect electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Locking fingers snap into holes with fingertip pressure.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstand a push back force of 35 pounds.
- Available in multiple sizes for use in .250″ (6,4 mm) to 6.00″ (152,4 mm) diameter holes.
- We offer the following brass-colored parts for lamp and lighting applications:
  Part No. 2012, SB 312-3 Brass
  Part No. 2033, SB 375-4 Brass
  Part No. 2041, SB 437-4 Brass

Larger 3.000″ (76,2 mm) to 6.000″ (152,4 mm) Diameter Parts

Small Packs Available

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PACKAGING		PART DIMENSIONS					
					BULK (Std)	SMALL PACK*	A Inside Diameter		B Head Diameter		C Overall Height	
in.	mm.	Black	White				in.	mm.	in.	mm.	in.	mm.
Multiple Locking Steps for Panel Thickness up to .250″ (6,4 mm)												
3.000	76,2	2461	2462	SB 3.000-39	300	5	2.47	62,7	3.15	80,0	.75	19,1
		2424	2425	SB 3.000-44	300	5	2.75	69,9	3.16	80,2	.72	18,3
3.375	85,7	2407	2408	SB 3.375-45	400	5	2.81	71,4	3.66	93,0	.72	18,3
3.500	88,9	2470	2471	SB 3.500-47	200	5	2.94	74,7				
4.000	101,6	2479	2480	SB 4.000-55	300	5	3.47	88,1	4.15	105,4		
5.000	127,0	2409	2410	SB 5.000-70	150	1	4.38	113,8	5.22	132,6	.74	18,8
6.000	152,4	2484	2485	SB 6.000-86	130	1	5.38	139,2	6.22	157,9		

Standard colors black and white. Consult Heyco for other colors.
*Small Pack available in Black color only. To order, please add the suffix -P to Part No., e.g., 2461-P

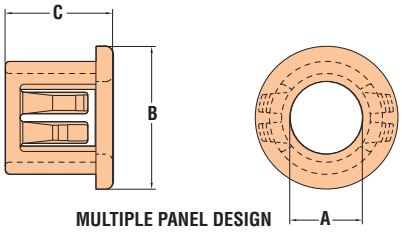

MULTIPLE PANEL DESIGN

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E15331
	Certified by Canadian Standards Association, File 8919
Flammability Rating	94V-2
Temperature Range	-.4°F (-18°C) to 221°F (105°C)

Quick Specs