



Heyco[®] Nylon Conduit Fittings


90° Sweep, NPT Hubs *by Flexicon*

For Flexible, Corrugated Nylon Conduit/Tubing

FITS CONDUIT NOMINAL SIZE	PART NO. Black	DESCRIPTION	THREAD SIZE	PART DIMENSIONS BODY AND SEALING UNIT							
				A Thread Length		B Max. O.A. Diameter		C Max. O.A. Length		D Clearance Hole	
				in.	mm.	in.	mm.	in.	mm.	in.	mm.
16 mm	F8606	FPA 16-050-90	1/2 NPT	.512	13,0	1.122	28,5	1.476	37,5	.875	22,2
21 mm	F8610	FPA 21-050-90	1/2 NPT	.512	13,0	1.260	32,0	1.555	39,5	.875	22,2
28 mm	F8616	FPA 28-075-90	3/4 NPT	.591	15,0	1.732	44,0	1.988	50,0	1.109	28,2
34 mm	F8620	FPA 34-100-90	1 NPT	.630	16,0	1.988	50,5	2.303	58,5	1.375	34,9

Standard color black.


- Unitary design and assembled shipment allows fast fit.
- No threading of the conduit or tubing is required to install.
- For use with Heyco Nylon Corrugated Conduit/Tubing. Suitable for use with both coarse and/or fine pitch conduit/tubing. Protection class IP 66 per EN 60529
- including high pressure water jet from any angle.
- Suitable for use by original equipment manufacturers.
- All nylon construction resists salt water, weak acids, gasoline, alcohol, oil, grease and common solvents. (This feature is not assessed by UL certification or testing.)
- Vibration and tamper resistant, but easily removed with a screwdriver.
- **Locknuts not included.**

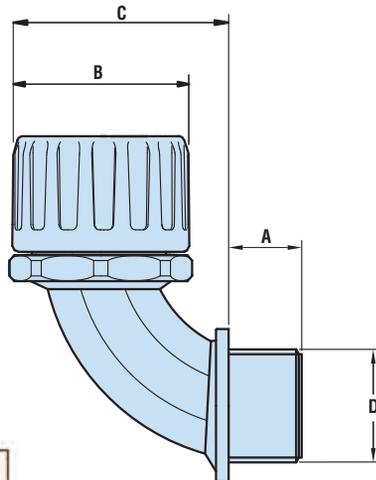

Assembly instructions:



Removal instructions:

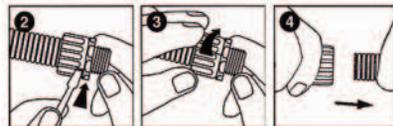

Material	Nylon 6/6
Certifications	Recognized under Underwriters' Laboratories File E229161 Approved as per EN50086
Flammability Rating	94V-2 and Low Fire Hazard Including Low Smoke, Low Toxicity as well as Halogen, Sulphur, and Phosphorus Free
Temperature Rating	The temperature rating for all FPA fittings meets or exceeds that for all Heyco Nylon Corrugated Conduit/Tubing
IP Rating	IP 66 standard as per EN60529

Quick Specs